
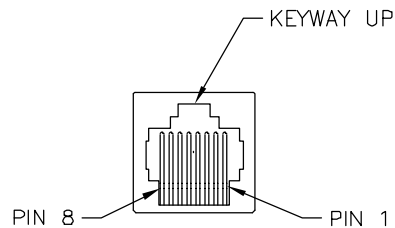


RECOMMENDED MOUNTING PANEL THICKNESS .032"-.040" (.81mm-1.0mm).
ITEM 5 MOUNT BRACKET MAY BE TRIMMED FOR THICKER MOUNTING PANEL.

REVISION HISTORY

SYM	DESCRIPTION	DATE
A	REDRAWN IN AUTOCAD	10-05-12

TRIM THIS EDGE
FOR THICKER PANELS

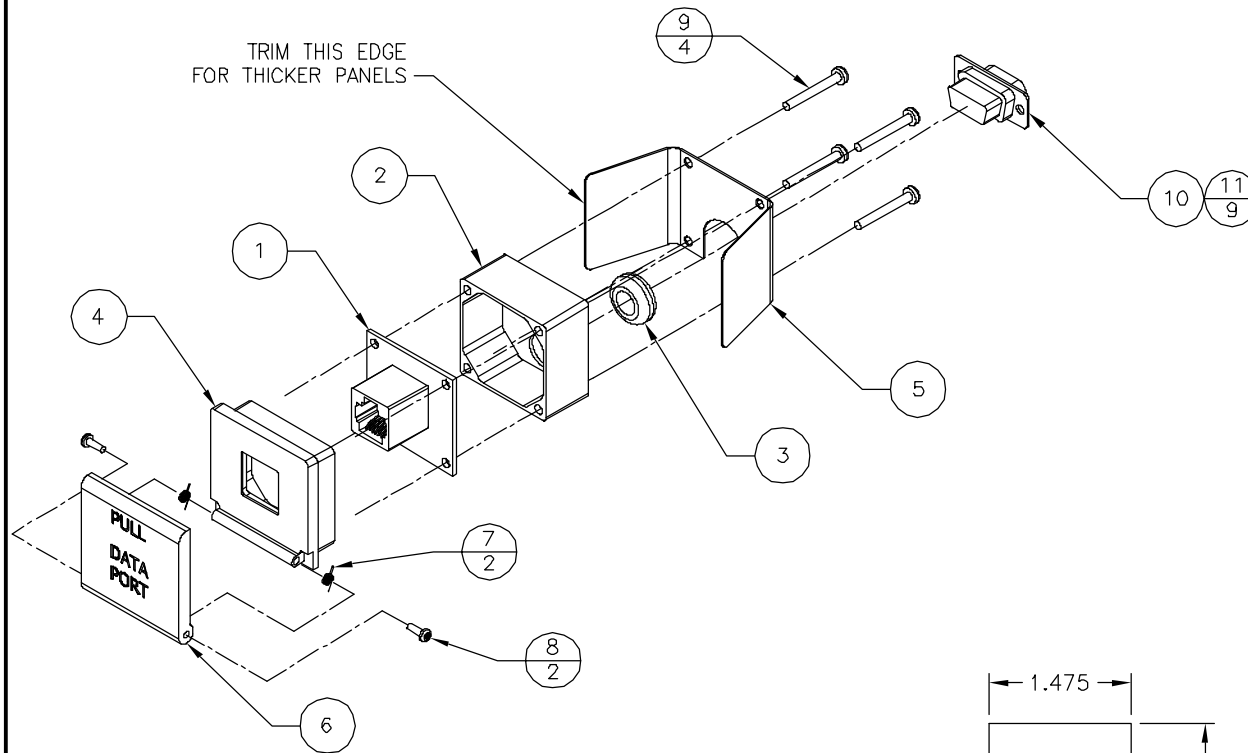

RECOMMENDED MOUNTING CUTOUT.
ALLOW 1.70 DEPTH BEHIND PANEL

* PART NOT SHOWN

18	AR*	XPF-1/4	SLEEVING
17	AR*	M22759/16-22-9	WIRE, 22AWG
16	2*	207467-1	CLAMP, CABLE
15	2*	5205980-1	SCREWLOCK, MALE
14	9*	M39029/63-368	CONTACT, SOCKET
13	1*	205203-8	CONNECTOR, RECEPTACLE
12	2*	5745563-3	SCREWLOCK, FEMALE
11	9	M39029/64-369	CONTACT, PIN
10	1	205204-9	CONNECTOR, PLUG
9	4	MS35206-221	SCREW, PNHD, #4-40
8	2	MS35206-203	SCREW, PNHD, #2-56
7	2	Q-91508 REV 1	SPRING
6	1	12720-06	DATA PORT LID
5	1	RB-0002	MOUNT BRACKET
4	1	12720-04	DATA PORT BEZEL
3	1	MS35489-6	GROMMET
2	1	12720-02	REAR HOUSING
1	1	RJ45-05	JACK & BOARD ASSY
ITEM	QTY	PART NUMBER	DESCRIPTION

PARTS LIST

CURRENTECH

P.O. BOX 13361
ARLINGTON, TX. 76094
214-693-6751

DWG. TITLE

RJ45-B
CUSTOMER DATA SHEET

DWG. NO.

RJ45-B CDS

REV LTR

A

SCALE: NONE

SHEET 1 OF 1

THESE TECHNICAL DATA AND DESIGNS DISCLOSED
HEREIN ARE THE EXCLUSIVE PROPERTY OF
CURRENTECH AND/OR CONTAIN PROPRIETARY
RIGHTS OF OTHERS AND ARE NOT TO BE USED
FOR FABRICATION OF PARTS WITHOUT PRIOR
WRITTEN CONSENT OF CURRENTECH

ELECTRICAL CONNECTIONS

RJ45 JACK	D-SUB CON
PIN 1	PIN 1
PIN 2	PIN 2
PIN 3	PIN 3
PIN 4	PIN 4
PIN 5	PIN 5
PIN 6	PIN 6
PIN 7	PIN 7
PIN 8	PIN 8
N/A	PIN 9 NOT USED